


- Electrical combo meter measurement function (voltage, current, kilowatt hour, power, cumulative working time)
- Cumulative working time function
- Electricity, cumulative working time clear function
- LED Backlight ON / OFF function
- Power-off data save function (save cumulative power, working time, display status and backlight on/off status)
- Large-screen LCD display (voltage, current, kilowatt hour, power, working time)
- Current transformer included

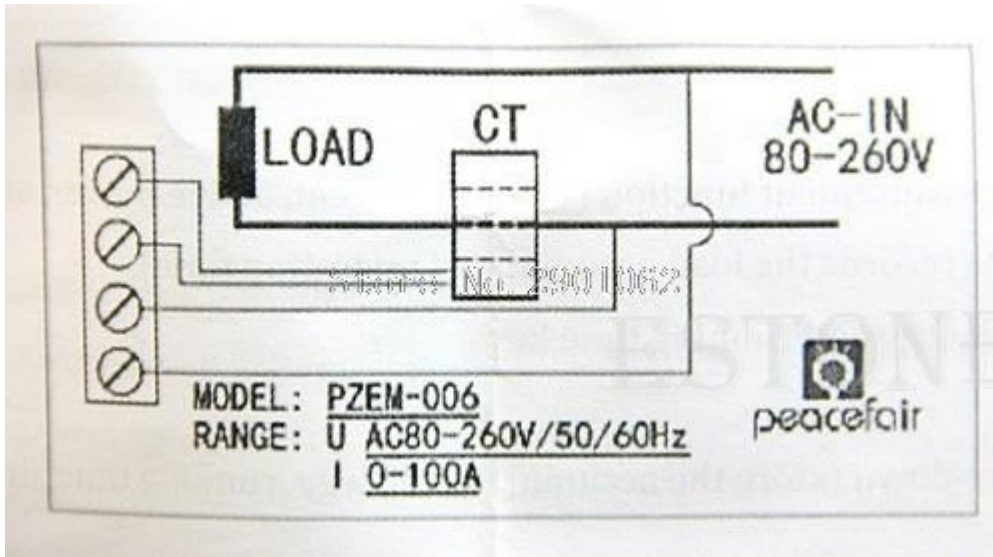

- **Specification:**
- **LED Backlight: Blue Light**
- Voltage Measuring Range: AC 80~260V
- Current Measuring Range: 0~100A
- Energy Measuring Range : 0~9999.99KWh
- Rated power: 0~22000W
- Working Time: 0~9999.59h
- Operating frequency: 45~65 hz
- Measurement accuracy: 1.0 class
- Size (L*W*H): 9.6 x 4.4 x 2.4cm/3.78"x1.73"x0.94"(approx)
- **Key Functions:**

UP	<ul style="list-style-type: none"> - In normal status sequence change (voltage→current→kilowatt hour→power→working time) - In the status of kilowatt hour and running time, the exit cleared status.
DOWN	<ul style="list-style-type: none"> - In normal status reverse change (working time→power→Kilowatt hour→current→voltage) - In the status of kilowatt hour and running time, the exit cleared state.
SET	<ul style="list-style-type: none"> - In the status of kilowatt hour and working time, press 3 seconds enter cleared status.
OK	<ul style="list-style-type: none"> - In normal status press to turn ON or OFF the backlight. - In the status of kilowatt hour and working time, cleared kilowatt hour or working time and the exit cleared status.